



SSA-C100/C110 /C120/C200

PROXIMITY / SMART CARD & KEY TAG

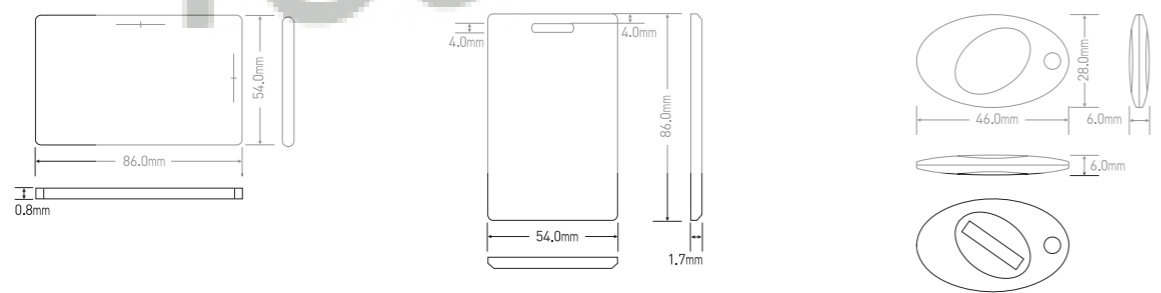

Specifications				
Model	SSA-C100	SSA-C110	SSA-C120	SSA-C200
Frequency	125KHz [Samsung Format]			13.56MHz [MIFARE]
Read Range	SSA-R1000 SSA-R1100 SSA-R2000 SSA-R1001 SSA-R1101 SSA-R2001	4 inch (10cm)	2 inch (5cm)	N/A
	SSA-R2010 SSA-R2011 SSA-S4000 SSA-S4001 SSA-S3010 SSA-S3011 SSA-S2100 SSA-S2101 SSA-S2000 SSA-S1000	N/A	4 inch (10cm) N/A 4 inch (10cm) 2 inch (5cm) 4 inch (10cm) N/A 4 inch (10cm) N/A 4 inch (10cm) 2 inch (5cm) 2 inch (5cm)	4 inch (10cm) N/A 4 inch (10cm) N/A N/A 4 inch (10cm) N/A 4 inch (10cm) N/A N/A
Encoding	Compatible with PSK type of 125KHz [Samsung Format]			Compatible with ISO 14443 type A [MIFARE] 13.56MHz
Operating Temperature	-30°C ~ +65°C [-22°F ~ +149°F]			
Operating Humidity	10% ~ 90% relative humidity non-condensing			
Weight	5.5g [0.01lbs]	9g [0.02lbs]	4g [0.01lbs]	5.5g [0.01lbs]
Card	PVC	ABS	ABS	PVC

Proximity / Smart Card

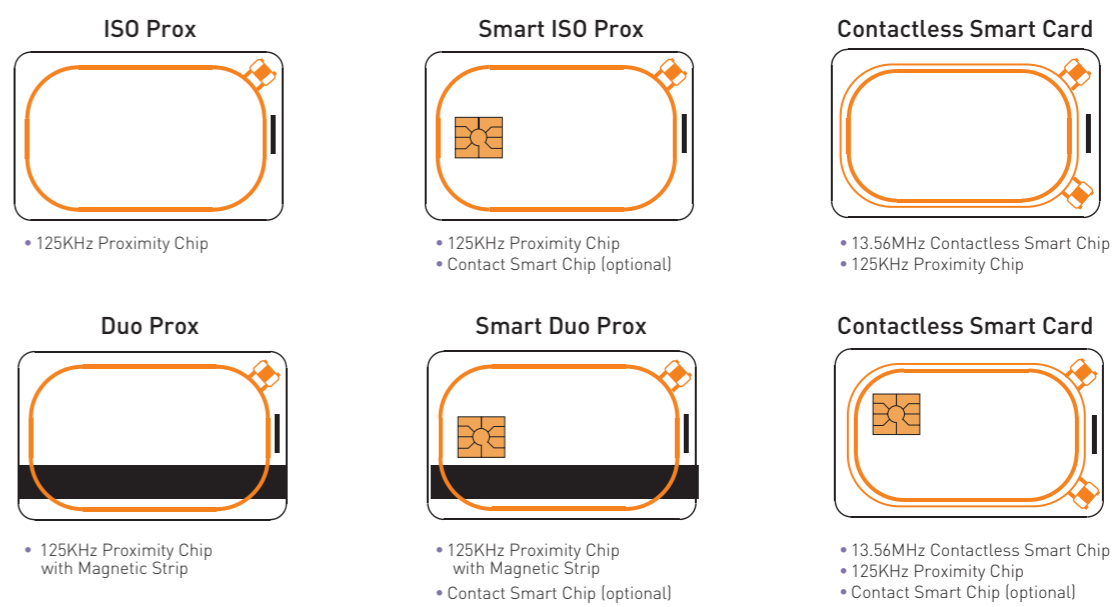

KEY Features

- ISO Credit Card Size and Thickness (SSA-C100/C200)
- 125KHz / Passive Type (SSA-C100/C110/C120)
- 13.56MHz / Passive Type (SSA-C200)
- Clamshell Type (SSA-C110)
- Key Tag (SSA-C120)

